查询CPT30050供应商

Schottky PowerMod

CPT30035 – CPT30050

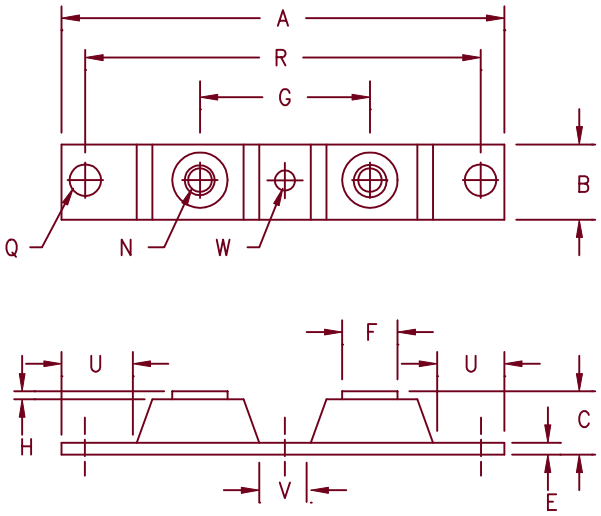

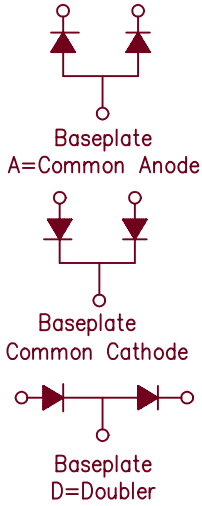

Notes:
Baseplate: Nickel plated copper

Dim.	Inches		Millimeters		
	Min.	Max.	Min.	Max.	Notes
A	---	3.630	---	92.20	
B	0.700	0.800	17.78	20.32	
C	---	0.630	---	16.00	
E	0.120	0.130	3.05	3.30	
F	0.490	0.510	12.45	12.95	
G	1.375 BSC		34.92 BSC		
H	0.010	---	0.25	---	
N	---	---	---	---	1/4-20
Q	0.275	0.290	6.99	7.37	Dia.
R	3.150 BSC		80.01 BSC		
U	0.600	---	15.24	---	
V	0.312	0.340	7.92	8.64	
W	0.180	0.195	4.57	4.95	Dia.

Microsemi Catalog Number	Working Peak Reverse Voltage	Repetitive Peak Reverse Voltage
CPT30035*	35V	35V
CPT30040*	40V	40V
CPT30045*	45V	45V
CPT30050*	50V	50V

*Add Suffix A for Common Anode, D for Doubler

- Schottky Barrier Rectifier
- Guard Ring Protection
- 300 Amperes/35 to 50 Volts
- 175°C Junction Temperature
- Reverse Energy Tested

Electrical Characteristics

Average forward current per pkg	$I_{F(AV)}$ 300 Amps	T_C = 136°C, Square wave, $R_{\theta JC}$ = 0.20°C/W
Average forward current per leg	$I_{F(AV)}$ 150 Amps	T_C = 136°C, Square wave, $R_{\theta JC}$ = 0.40°C/W
Maximum surge current per leg	I_{FSM} 2000 Amps	8.3ms, half sine, T_J = 175°C
Maximum repetitive reverse current per leg	$I_{R(OV)}$ 2 Amps	f = 1 KHZ, 25°C
Max peak forward voltage per leg	V_{FM} 0.70 Volts	I_{FM} = 200A; T_J = 125°C*
Max peak forward voltage per leg	V_{FM} 0.76 Volts	I_{FM} = 200A; T_J = 25°C*
Max peak reverse current per leg	I_{RM} 75 mA	V_{RRM}, T_J = 125°C*
Max peak reverse current per leg	I_{RM} 4.0 mA	V_{RRM}, T_J = 25°C
Typical junction capacitance per leg	C_J 4600 pF	V_R = 5.0V, T_C = 25°C

*Pulse test: Pulse width 300 usec, Duty cycle 2%

Thermal and Mechanical Characteristics

Storage temp range	T_{STG}	−55°C to 175°C
Operating junction temp range	T_J	−55°C to 175°C
Max thermal resistance per leg	$R_{\theta JC}$	0.40°C/W Junction to case
Max thermal resistance per pkg	$R_{\theta JC}$	0.20°C/W Junction to case
Typical thermal resistance (greased)	$R_{\theta CS}$	0.08°C/W Case to sink
Terminal Torque		35–50 inch pounds
Mounting Base Torque (outside holes)		30–40 inch pounds
Mounting Base Torque (center hole)		8–10 inch pounds
center hole must be torqued first		
Weight		2.8 ounces (75 grams) typical

COLORADO Microsemi
800 Hoyt Street
Broomfield, CO. 80020
PH: (303) 469-2161
FAX: (303) 466-3775
www.microsemi.com

3-7-00 Rev. 1

CPT30035 – CPT30050

Figure 1
Typical Forward Characteristics – Per Leg

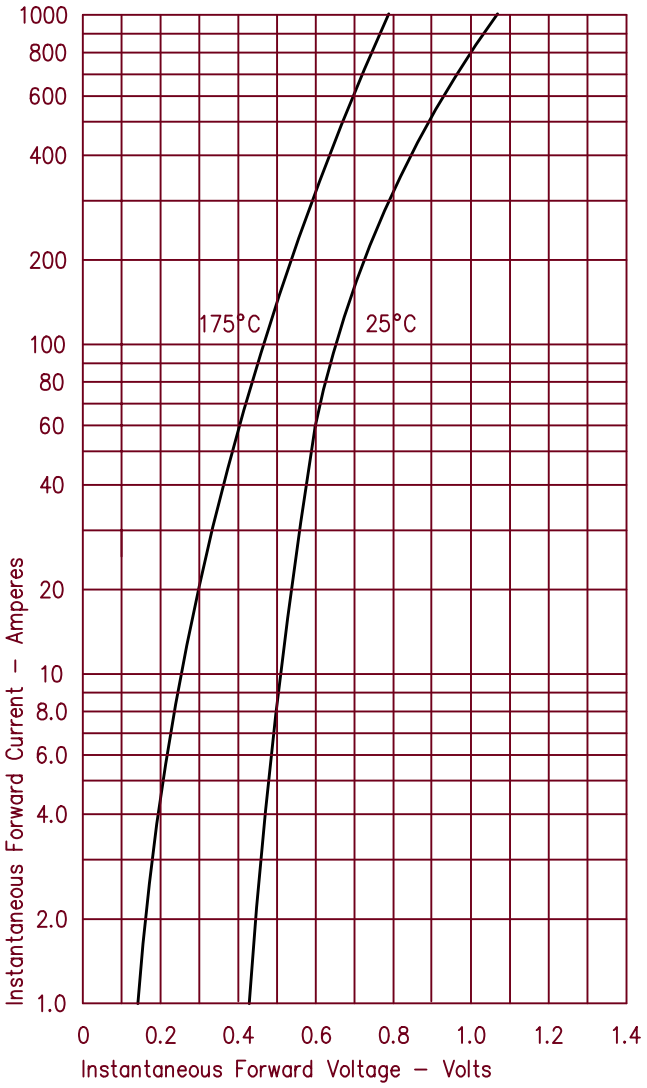

Figure 2
Typical Reverse Characteristics – Per Leg

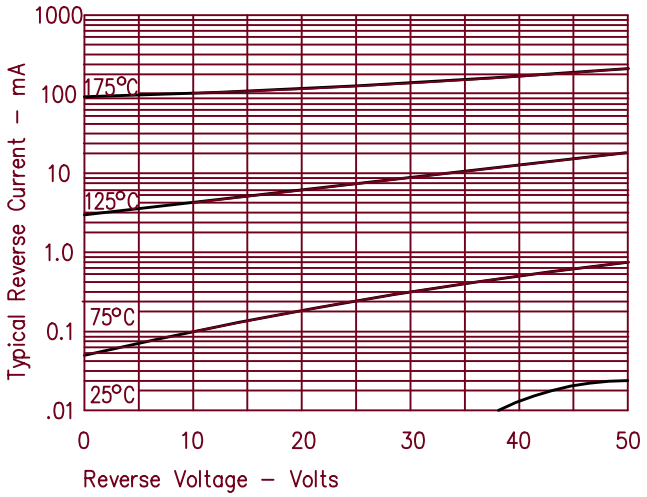

Figure 3
Typical Junction Capacitance – Per Leg

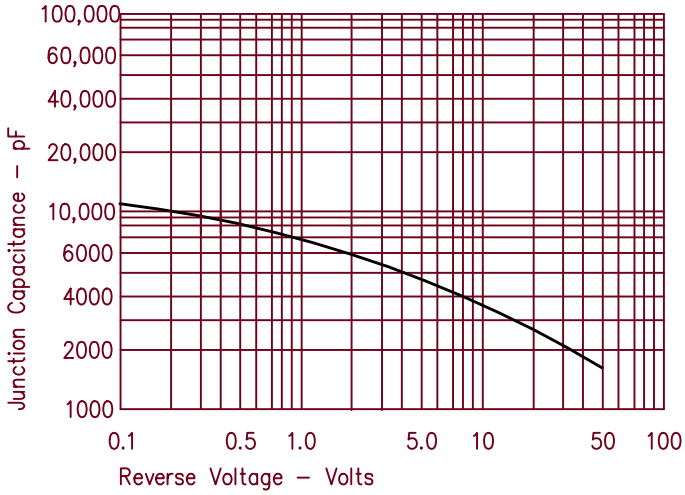

Figure 4
Forward Current Derating – Per Leg

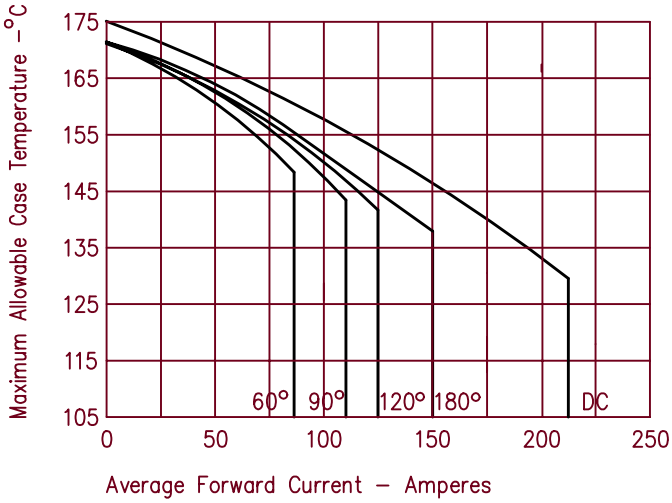

Figure 5
Maximum Forward Power Dissipation – Per Leg